



# Duct System

# Duct System

Pre-grooved Integrated Panel System supplied complete with fixings.  
Framing for panels installed onsite by Cube Installers and panels fitted to frames onsite

## Specification

### Panels

HPL Core/Face: High density particleboard faced 1 side with high pressure laminate and balancer on reverse giving 18mm nominal thickness  
Edge: Matching 2mm thick impact resistant ABS lipping

SGL Core/Face: Solid grade laminate with colour finish to both sides giving 13mm nominal thickness  
Edge: Polished and radiused

Colour: from Dunhams colour selector

Cut-outs: not included unless mentioned on quote

### Dimensions

Height: Full room height/ Cubicle Height/ Low level removable access panels  
Floor Clearance: Panels commence at 100mm above finished floor level to allow for skirting detail by others.

### Fixings

Panel Fixing: Concealed Keku clips (lift-off or pull-out pattern)

Shadow Strips: 18mm thick laminated exterior MDF shadow gaps supplied with edges grooved to receive our secret fixing clips.

### Frames

Frames erected onsite by Cube Installers.

Factory pre-grooved panels fitted to frames onsite

### Options


Panels: Hinged panels available as an alternative to lift-off/ pull-out

Panel Finishes: Alternative laminate finishes/patterns to those offered on the Dunhams colour selector can be sourced to meet your requirements.

Low level



Cubicle Height


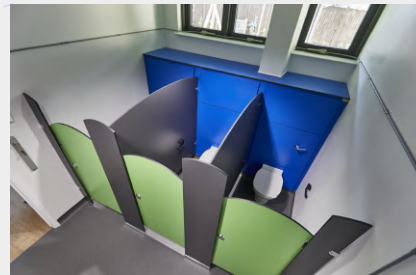


Full room height



Pull-out Clips:

Lift-off Clips:



Call: 01692 632000 | Email: [info@cube-install.com](mailto:info@cube-install.com)

Cube Install Limited The Granary, School Road, Neatishead, Norwich NR12 8BU

[www.cube-install.com](http://www.cube-install.com)

Registered in England No. 10501718

