



Duct+ System

Duct+ System

Integrated Panelling System supplied complete with frames

Specification

Panels

HPL Core/Face: High density particleboard faced 1 side with high pressure laminate and balancer on reverse giving 18mm nominal thickness
Edge: Matching 2mm thick impact resistant ABS lipping

SGL Core/Face: Solid grade laminate with colour finish to both sides giving 13mm nominal thickness
Edge: Polished and radiused

Colour: from Dunhams colour selector
Cut-outs: not included unless mentioned on quote

Dimensions

Height: Full room height/ Cubicle Height/ Low level removable access panels
Floor Clearance: Panels commence at 100mm above finished floor level to allow for skirting detail by others.

Fixings

Panel Fixing: Concealed Keku clips (lift-off or pull-out pattern)
Shadow Strips: 18mm thick laminated exterior MDF shadow gaps supplied with edges grooved to receive our secret fixing clips.

Frames

Factory constructed birch ply subframes
Access Panels pre-fitted to subframes


Options

Panels: Hinged panels available as an alternative to lift-off/ pull-out
Panel Finishes: Alternative laminate finishes/patterns to those offered on the Dunhams colour selector can be sourced to meet your requirements.


Low level




Cubicle Height

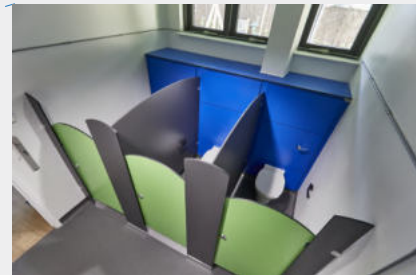


Full room height

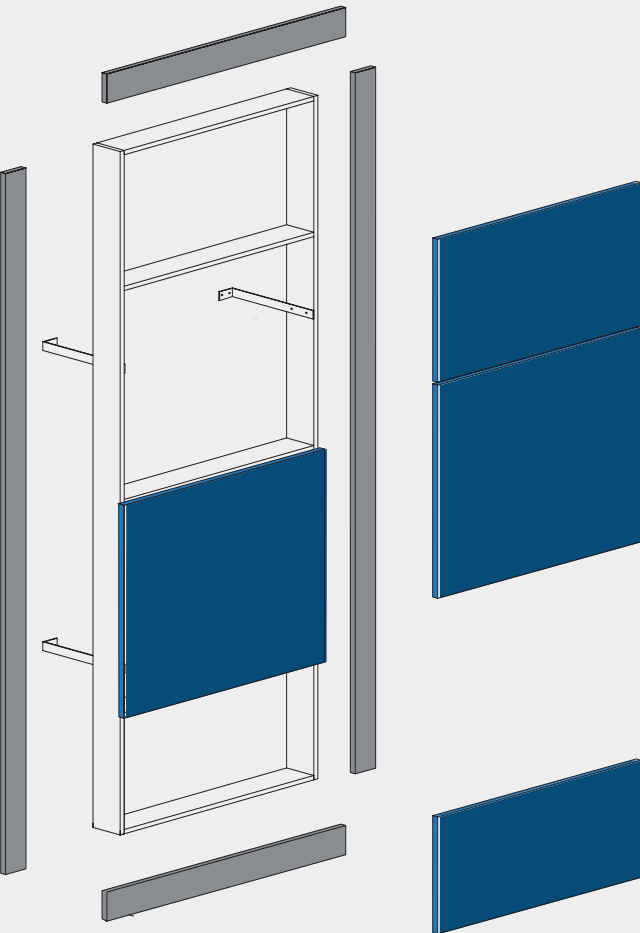

Pull-out Clips:



Lift-off Clips:



Call: 01692 632000 | Email: info@cube-install.com
Cube Install Limited The Granary, School Road, Neatishead, Norwich NR12 8BU

www.cube-install.com

Registered in England No. 10501718

