




SGL Vanity Unit

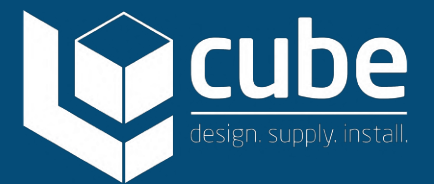

SGL Vanity Unit

Hard wearing and durable solution to high traffic and wet area washrooms

Specification

SGL Top Construction:

Style: Square butt jointed 200mm downstand and 100mm upstand with thumbnail radius exposed edges.

Depth: 300/350mm for semi-recessed basins
600mm for inset basins

Material: 13mm solid grade laminate

Colours; ref to Dunhams colour selector

Cut-Outs: Bowl cut-outs are not included unless mentioned separately

Unit Construction:

Frame: Factory constructed WBP ply sub-frame pre-fitted with lift off access panels and 100mm integral factory laminated plinth

SGL Panel Option:

SGL Core/Face: 13mm solid grade laminate panels

SGL edge: profile radiused and polished

Colour: ref to Dunhams colour selector

HPL Panel Option:

HPL Core/Face: 18mm high pressure laminate panels - high density particle-board faced both sides with high pressure laminate.

HPL edge: matching 2mm thick impact resistant ABS lipping

Colour: ref to Dunhams colour selector

Options:

Height: low height options available

Colour: Grafix range of patterns/designs to access panels available as an extra.

Unit construction options:


Factory Assembled 18mm MFC carcass with shelves and hinged doors

Factory assembled ply subframe with sloped under panels for access


Factory assembled ply sub-frame with panels supplied pre-hung on sprung cabinet hinges with key operated cam lock.

Design Options:

Fully Recessed

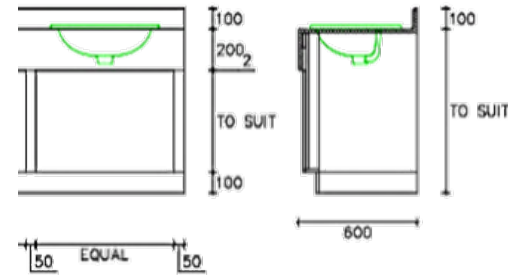

Semi Recessed

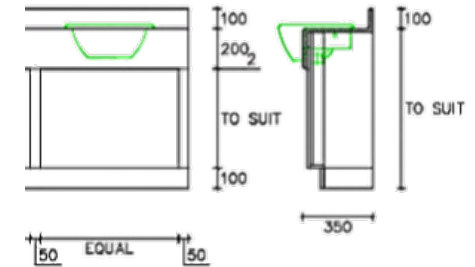

Call: 01692 632000 | Email: info@cube-install.com
Cube Install Limited The Granary, School Road, Neatishead, Norwich NR12 8BU

www.cube-install.com

Registered in England No. 10501718

