



HPL Vanity Unit



HPL Vanity Unit

Practical and cost-effective solution for hand wash areas

Specification

HPL Top Construction:

Style: 18mm thick, 200mm post-formed front apron and 100mm high covered rear upstand

Depth: 300mm/350mm for semi-recessed basins
600mm for inset basins

Core/Face: High pressure laminate on 18mm MR MDF

Colours: ref to Dunhams colour selector

Cut-Outs: Bowl cut-outs are not included unless mentioned separately

Unit Construction:

Frame: Factory constructed WBP ply sub-frame pre-fitted with lift off access panels and 100mm integral factory laminated plinth

SGL Panel Option:

SGL Core/Face: 13mm solid grade laminate panels

SGL edge: profile radiused and polished

Colour: ref to Dunhams colour selector

HPL Panel Option:

HPL Core/Face: 18mm high pressure laminate panels - high density particle-board faced both sides with high pressure laminate.

HPL edge: matching 2mm thick impact resistant ABS lipping

Colour: ref to Dunhams colour selector

Options:

Height: low height options available

Colour: Grafix designs to access panels available as an extra.

Unit construction options:


Factory Assembled 18mm MFC carcass with shelves and hinged doors

Factory assembled ply subframe with sloped under panels for access



Factory assembled ply sub-frame with panels supplied pre-hung on sprung cabinet hinges with key operated cam lock.

Design Options:

Fully Recessed

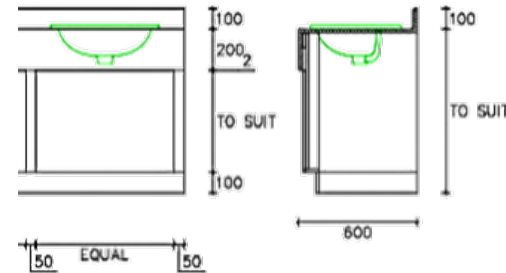

Semi Recessed

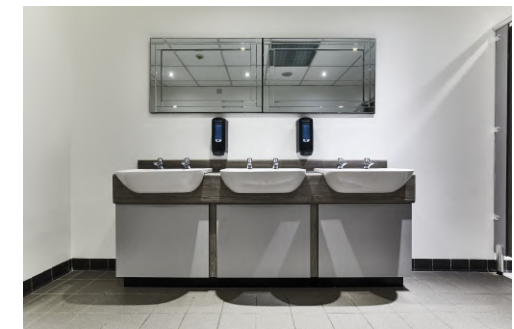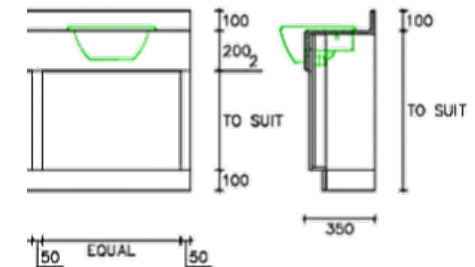

Call: 01692 632000 | Email: info@cube-install.com

Cube Install Limited The Granary, School Road, Neatishead, Norwich, NR12 8BU

www.cube-install.com

Registered in England No. 105718

Acclaim
Accreditation

Constructionline
Gold Member

ISO 45001
ISO 9001
ISO 14001
ISO 45001
Cert No. 15847